



CPS® Automotive

REVOLUTIONARY EASE AND ENDURANCE

Quickly and efficiently **Recover, Recycle and Recharge**
automotive A/C systems with the FX Series.

**7" COLOR TOUCH
SCREEN CONTROL PANEL**

**PATENTED OILLESS
COMPRESSOR**

**PATENTED
MOTOR-CONTROLLED
BALL VALVES**

1-2-5 WARRANTY



**HYBRID
COMPATIBLE**



CPS GLOBAL HEADQUARTERS
1010 East 31st Street
Hialeah, Florida 33013 U.S.A.


CPS PRODUCTS CANADA LTD.
1324 Blundell Road
Mississauga, ON, L4Y 1M5

FOR MORE INFORMATION CALL:
Toll Free: 877.776.8486
Telephone: 905.615.8620

[cpsproducts.com /fxadvantage/](http://cpsproducts.com/fxadvantage/)

CPS reserves the right to make changes to, or discontinue any product or service identified in this publication without notice. CPS advises its customers to ensure they have obtained the latest and most current version of any relevant information before placing any orders. ©CPS PRODUCTS. ALL RIGHTS RESERVED.



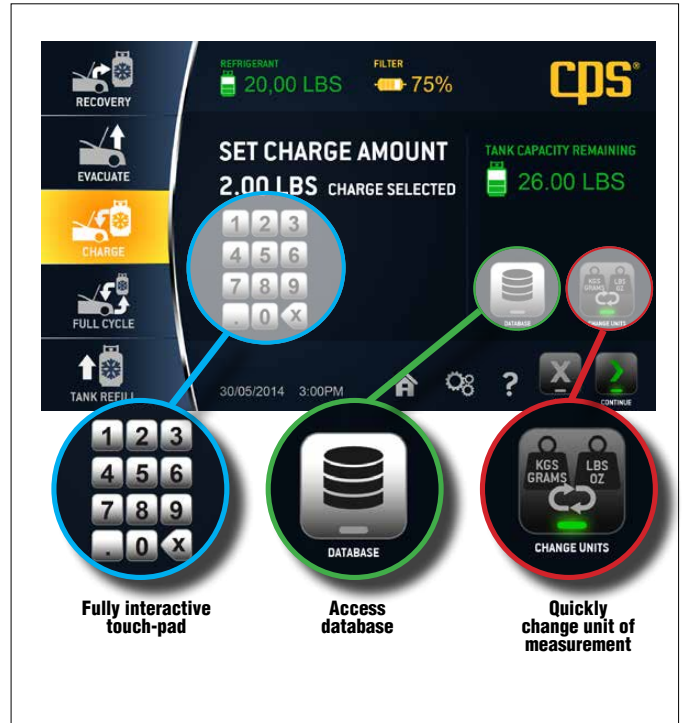

FEATURES

- 7" Color touch screen control panel
- 1-2-5 Warranty
- Displays maximum load up to 220 lbs. (up to 100 kg)
- Foam-filled wheels
- Refrigerant Management System monitors filter life and refrigerant usage
- Hybrid compatible
- Patented unique, fast and complete refrigerant changeover system
- Supports multiple languages/UOM
- Quickly access all functions from the main screen
- 'Car Health' Mode enables printing a snap-shot of pressures before and after service
- Dual handle bars/hose drapes

2/3 HP OILLESS COMPRESSOR

- Designed and built by CPS for high capacity commercial applications
- Eliminates failure issues due to improper oil filling of traditional compressors

MOTOR-CONTROLLED BALL VALVES

- Opens wider for greater flow
- Resistant to clogging of debris or sealants

SPECIFICATIONS

- Thermal printer standard on all models
- Vehicle database (included) Refrigerant and oil charging data
- 50 lb recovery tank (two with FX3030)
- Recovery rate = Up to 1 lb/min
- 6 CFM vacuum pump/ 10 micron rated
- 3.5" gauges
- 10' power cord
- 115v, 850 W

OPTIONAL ACCESSORIES



FX SERIES KITS

Everything you need to be SAE compliant! Includes oil injection kit, electronic leak detector, filter maintenance kit and digital thermometer.
FXP1 with HFO oil injection kit
FXP2 with dual oil injection kit



FILTER MAINTENANCE KIT

Includes filter, vacuum pump oil and coupler o-rings.
FX3030X1 Filter Maintenance Kit
ARXF5 Filter only



FX SERIES DUST COVER

Durable, water-repellent, fitted nylon cover with clear window display and Velcro slit for easy removal.
FXXC Dust Cover

Part No.	Certification	Refrigerant	Dimensions (inches)				UPC	HTC
			H (in)	W (in)	D (in)	Weight (lb)		
FX134A	SAE J2788H	R134a	47.5	27.5	25	208	750377134012	8415.83.90
*FX1234W <small>without Ref ID</small>	SAE J2843	R1234yf	47.5	27.5	25	208	750377123412	8415.83.90
FX1234	SAE J2843	R1234yf	47.5	27.5	25	208	750377123405	8415.83.90
FX3030	SAE J3030	R134a & R1234yf	60	27.5	25	240	750377303012	8415.83.90

* Requires use of External Identifier connected via USB. CPS Part number RI2012YF